




FAR-4/42

Professional Line

High precision automatic punching machine

This automatic punching machine from Rilecart has been designed specifically for small and medium sizes. Reliability, a choice of several punching tools together with an intensive market research into customers production requirements allow the FAR-4/42 to achieve the best quality standards.

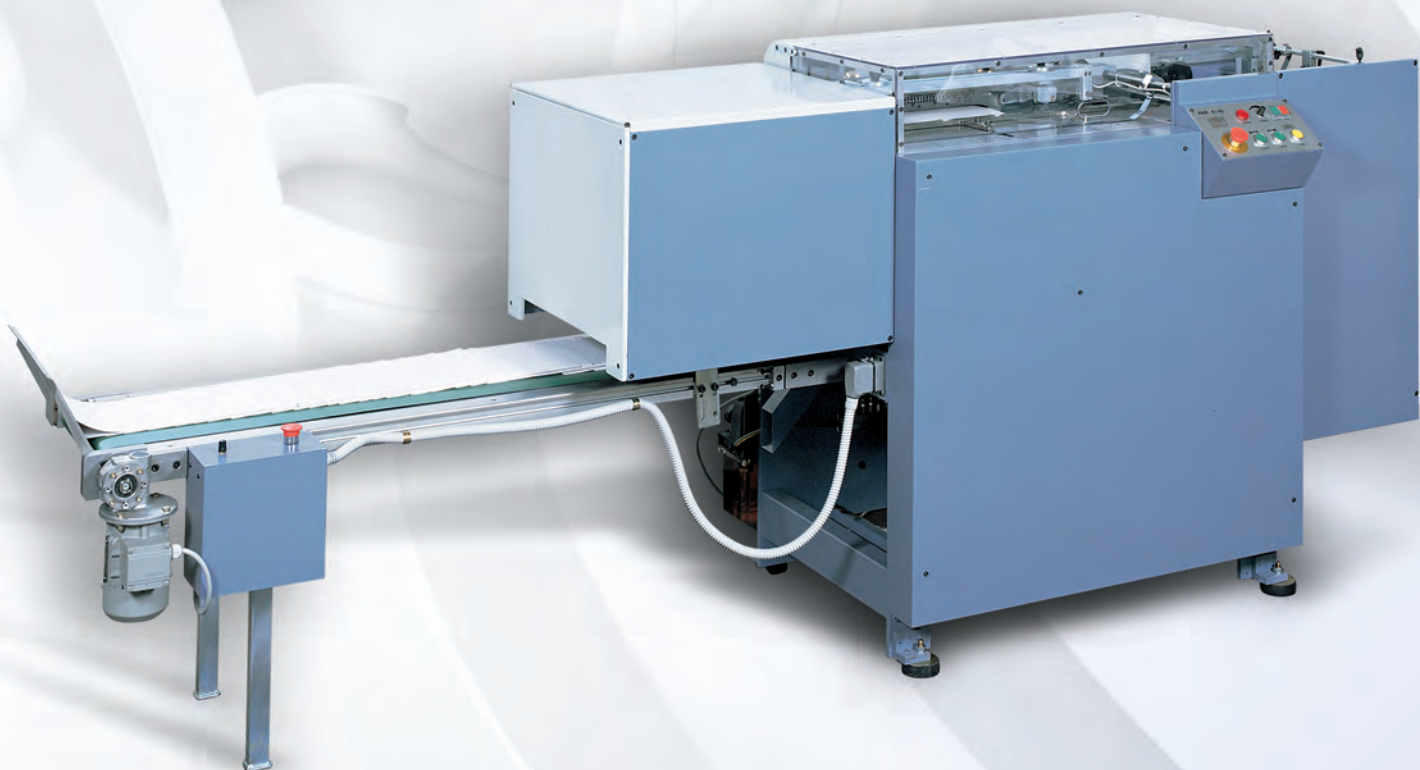

www.rilecart.it

 **RILECART**[®] S.r.l.
WIREBIND INTERNATIONAL




FAR-4/42 Professional Line

High precision automatic punching machine



The punching tool.



Sequence keeping device.




Picking device.



Paper feeding system.

PUNCHING PATTERN

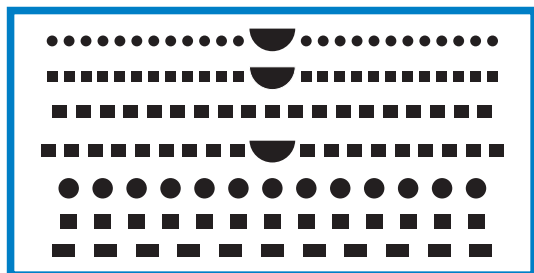

HOW IT WORKS

FAR-4/42 can be fed continuously with material of variable thickness (paper and/or light cardboard). Sheets are safely picked-up in bunches of 1,5/2 mm. each time, centred and punched with precision and accuracy. Sheets are then transported by a belt into the punching section. Punched bunches are kept in numerical sequence and collected on a separate conveyor, in shingle style, so that the following procedures are made easier.

FEATURES

- Maximum thickness per stroke: 2,5 mm. (standard 1,5 mm.)
- Maximum punching size: 400 x 300 mm.
- Minimum punching size: 110 x 90 mm.
- Speed: up to 150 strokes per minute.
- Punching distance from the edge: from 2 mm. up to 6 mm. depending on punching tools used.
- Operates continuously using a pre-loading device.
- Shingle style delivery table with adjustable speed.
- Several punching tools for double loop binding or other mechanical binding systems.

TECHNICAL SPECIFICATIONS

- ⚡ 240 V single phase 50/60 Hz; 3 Kw
- 📏 H 1200 x D 700 x L 3000 mm.
- ⚖️ 1050 Kg

STANDARD PUNCHING TOOLS

- GF400/3: 400 mm., pitch 3:1", 48 pins 3,7 x 4,0 mm.
- GF400/3 5x4: 400 mm., pitch 3:1", 48 pins 5,0 x 4,0 mm.
- GF400/2: 400 mm., pitch 2:1", 32 pins 4,7 x 5,0 mm.
- GF400/2 6x6: 400 mm., pitch 2:1", 32 pins 6,0 x 6,0 mm.

Other punching tools are available on request.

The Company reserves itself the right to modify the features of the products shown in this catalogue.

